

AR208

MINI VERTICAL LINE ARRAY SYSTEM



- Dual 8" LF Neodymium in Vented Enclosure
- 1,75" Polyimide Driver on Wave Guide
- Fly Mounting Included
- Powering Mode: Full Range or Bi-Amp
(with Internal Passive Crossover)
- For Touring or Fixed Installation

Product Information


2-WAY loudspeaker system provides high output, low distortion sound reinforcement for the entire range of pro audio application. The 200 mm (8") low frequency cone with 51 mm (2") voice coil with Neodymium magnet and 44 mm (1.75") voice coil high frequency compression driver provides higher output and low distortion plus enhanced power handling capabilities for better performance in both touring and permanently installed applications. AR208 is designed specifically for vertical curvilinear array.

Data Sheet

| | |
|---|--------------------------------------|
| Frequency Response | ±3 dB 75 Hz ~ 18 KHz -10 dB 42 Hz |
| Sensitivity (1 Watt @ 1 m) | 100 dB |
| Max SPL Calculated (Power AES) [PEAK] | 128 dB [132 dB] |
| Nominal Input Impedance (Ω) | 16 Ω |
| Power Handling (Watts Cont. AES) [PEAK] | 620 W [1550 W] |
| Nominal Dispersion (@ -6 dB) | 120° (H) x 9° (V) |
| Dimensions mm (±1 mm) (H x W x D) | 260 x 700 x 500 with Hardware |
| Weight | 23 Kg |

Enclosure Material

- Enclosure Material: Birch Plywood of 15 mm
- Finish: Texture Polyurethane Black Paint
- Suspension: 4+4 Point Mounting Suspension
- Grille: Powder Coated Perforated Steel with anti-dust foam
- Connectors: 2 Neutrik NL4 Speakon
- Optional Accessories: Flight Case for 4 AR208, Skate & Bag

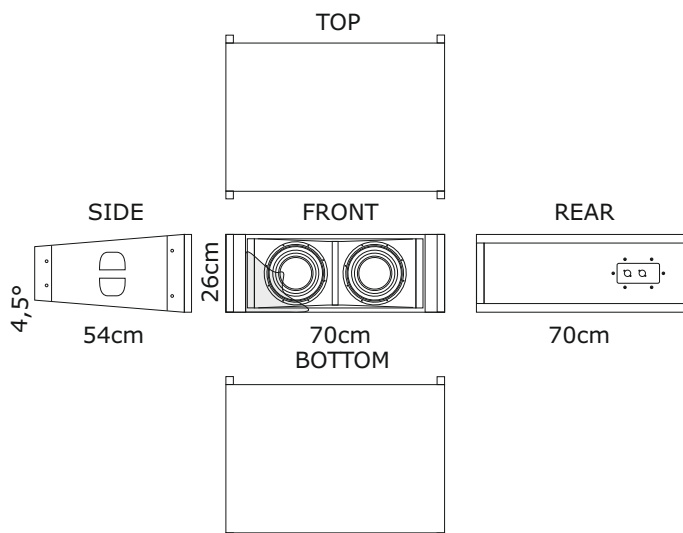

ARRAY SYSTEMS | INSTALL | TOURING



LSS ADVANCED SPEAKER SYSTEMS