

PSUB4

REFLEX SUBWOOFER SYSTEM



- 18" LF Subwoofer Horn-Loaded
- Powering Mode: Passive with external Digital Processor
- For Touring Use or Permanent Installation

Product Information

PSUB4 provides high output, low distortion sound reinforcement. PSUB4 is designed for live sound reinforcement application. High performance and very high peak output for concert sound. PSUB4 powering mode is only passive amplified operation with external Digital Processor. PSUB4 is the ideal product for bass frequency reinforcement of concert touring or club applications. PSUB4 is appropriate in any portable application requiring extremely high output levels of sub bass information.

Data Sheet

Frequency Response	±5 dB 35 Hz ~ 120 Hz -10 dB 31 Hz
--------------------	--------------------------------------

Sensitivity (1 Watt @ 1 m)	105 dB
----------------------------	--------

Max SPL Calculated (Power AES) [PEAK]	137 dB [143 dB]
---------------------------------------	--------------------

Nominal Input Impedance (Ω)	8 Ω
-----------------------------	-----

Power Handling (Watts Cont. AES) [PEAK]	1500 W 7000 W
---	------------------


Nominal Dispersion (@ -6 dB)	360°
------------------------------	------

Dimensions mm (±1 mm) (H x W x D)	940 x 600 x 860
--------------------------------------	-----------------

Weight	75 Kg
--------	-------

Enclosure Material

- Enclosure Material: Birch Plywood of 18 mm, Wheels Included
- Finish: Texture Polyurethane Black Paint
- Connectors: 2 Neutrik NL4 Speakon

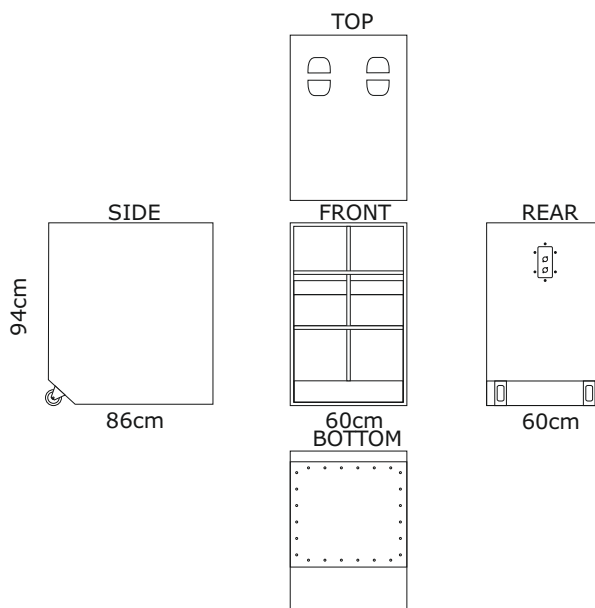

INSTALL | CONCERT HALL | EVENTS | TOURING