

SP530A

2-WAY SELF POWERED LOUDSPEAKER SYSTEM



- 12" LF in Vented Enclosure
- 1.75" Compression Driver with Horn
- Fly Mounting Points and Pole mount Cup Included
- Powering Mode: Bi-Amp with Digital Amplifier 750 W + 370 W
- For Portable or Permanent Installation

Product Information

2-WAY loudspeaker system provides high output, low distortion sound reinforcement for the entire range of pro audio application. The 320 mm (12") low frequency cone and 100 mm (4") voice coil and 44 mm (1.75") voice coil high frequency compression driver provides higher output and lower distortion plus enhanced power handling capabilities for better performance in both touring and permanently installed applications. The powering mode is Active with Digital Amp module and DSP Controller. It is possible to choose within 4 different presets stored by default.

Data Sheet

Frequency Response	±5 dB 55 Hz ~ 18 KHz -10 dB 40 Hz
--------------------	--------------------------------------

Sensitivity (1 Watt @ 1 m)	98 dB
----------------------------	-------

Max SPL Calculated (Power EIAJ) [PEAK]	128 dB [132 dB]
--	--------------------

Nominal Input Impedance (Ω)	4 Ω
-----------------------------	-----

Power Handling (Watts EIAJ) [PEAK]	1120 W [2240 W]
------------------------------------	--------------------

Nominal Dispersion (@ -6 dB)	90° (H) x 40° (V)
------------------------------	-------------------


Dimensions mm (±1 mm) (H x W x D)	590 x 390 x 390
--------------------------------------	-----------------

Weight	22 Kg
--------	-------

Enclosure Material

- Enclosure Material: Birch Plywood of 18 mm
- Finish: Texture Polyurethane Black Paint
- Suspension: 12 Point Mounting Suspension M10
- Grille: Powder Coated Perforated Steel with anti-dust foam
- Connectors: Neutrik XLR In & Out + AC Power: 240V, Powercon In & Out
- Optional Accessories: Fly Clip with Ring, Speaker Soft Bag

INSTALL | EVENTS | PORTABLE | TOURING

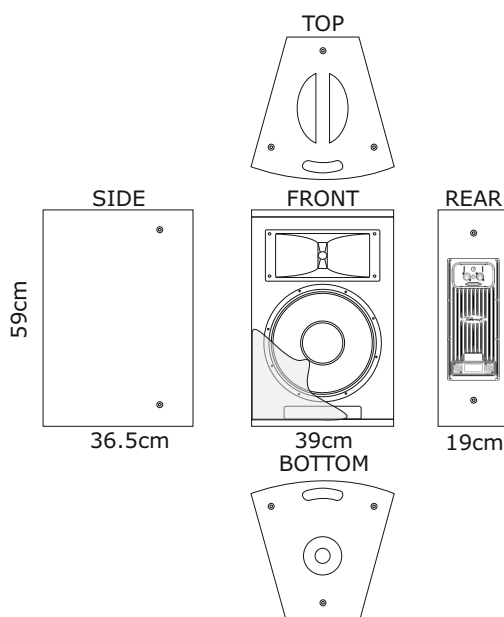

LSS ADVANCED SPEAKER SYSTEMS